


Liling Ceramxpert Trading Co., Ltd.

Tel.: 0086-193 7331 0917 Web: www.ceramxpert.com

Contact: Judy Li(Judy@ceramxpert.com)

High Thermal Conductivity Aluminum Nitride (AlN) Ceramic Rods

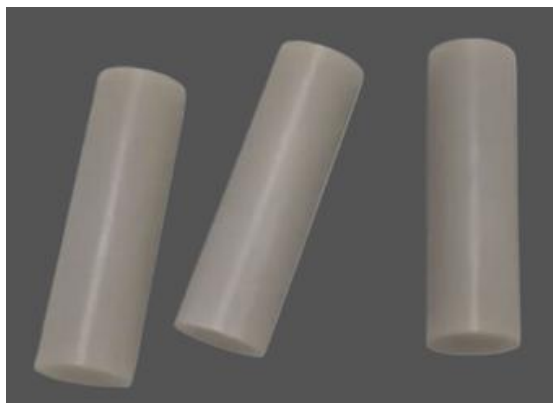

Size details:

Item NO.	Diameter	Length	Coefficient of thermal conductivity
CS-AIN-AG001	12	150	≥170W/m·k
CS-AIN-AG002	17	150	≥170W/m·k
CS-AIN-AG003	19	150	≥170W/m·k
CS-AIN-AG004	22	150	≥170W/m·k
CS-AIN-AG005	25	150	≥170W/m·k
CS-AIN-AG006	28	150	≥170W/m·k
CS-AIN-AG007	31	150	≥170W/m·k
CS-AIN-AG008	35	150	≥170W/m·k
CS-AIN-AG009	45	150	≥170W/m·k
CS-AIN-AG010	47	150	≥170W/m·k
CS-AIN-AG011	10	70	≥170W/m·k
CS-AIN-AG012	20	100	≥170W/m·k
CS-AIN-AG013	25	150	≥170W/m·k
CS-AIN-AG014	30	300	≥170W/m·k
CS-AIN-AG015	10	25	≥170W/m·k
CS-AIN-AG016	25	100	≥170W/m·k
CS-AIN-AG017	30	300	≥170W/m·k
CS-AIN-AG018	40	400	≥170W/m·k

Note: We can customize aluminum nitride rods dimensions upon request.

The listed dimensions are for reference only. Please contact us if you require tight tolerances.

Judy Li (Judy@ceramxpert.com)

Mobile / WhatsApp / WeChat: 0086-19373310917

Website: www.ceramxpert.com